



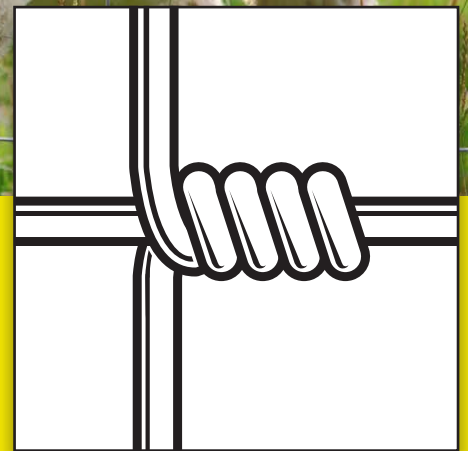

# TWINLOCK NETTING

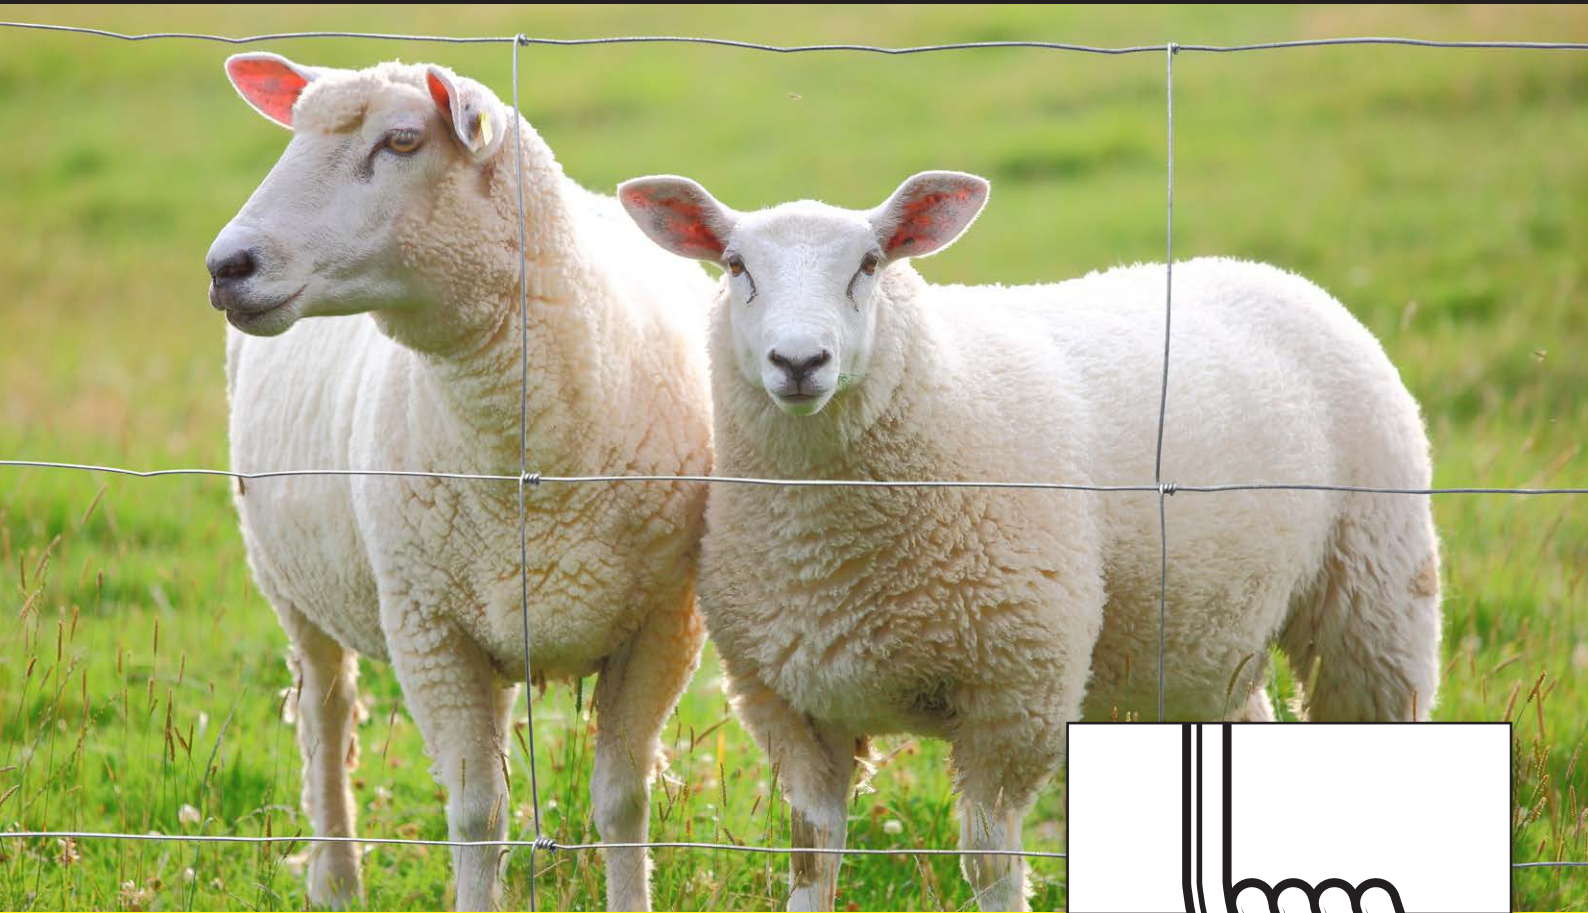

Twinlock netting has been designed to provide farmers with fast and cost effective temporary and permanent stock control solutions. Suitable for all low and medium pressure applications Twinlock netting is manufactured using zinc/alloy coated wire for long life and is available in 2.00mm and 2.50mm wire diameters.

## Applications:

<b>FIELD</b>	Sheep, cattle, goats, conservation and forestry blocks
<b>SOFT</b>	Can be electrified break feeding, Lambs / docking
<b>LIGHT</b>	Low stock pressure, lifestyle and residential fences

## Size range available:

TYPE	DESCRIPTION	LINE WIRES	HEIGHT (mm)	STAY WIDTH (mm)	LENGTH (m)
FIELD	B8 / 900	8	900	150 / 300	50 / 100
FENCE	B8 / 800	8	800	300	100
	B7 / 900	7	900	150 / 300	50 / 100
	B6 / 700	6	700	300	100
LIGHT*	BL8 / 900	8	900	150 / 300	50 / 100
	BL7 / 900	7	900	300	50 / 100
SOFT**	B5 / 525	5	525	150	100

\* Light uses a 2.00 mm high tensile wire for the line wire.

\*\* Soft uses a low tensile wire for the line wire.



SINCE 1903

Freephone 0800 333 188  
www.cyclonewire.co.nz

A division of

**easysteel**<sup>™</sup>  
A FLETCHER BUILDING COMPANY