



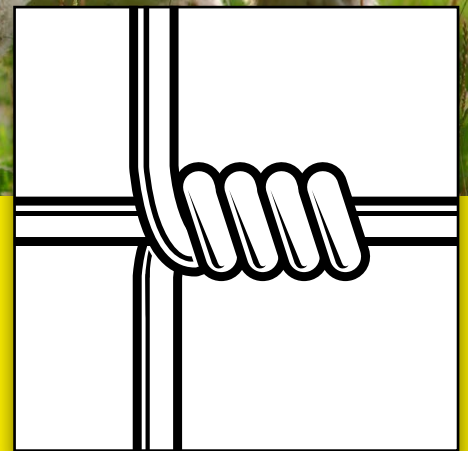

TWINLOCK FABRICATED FENCE

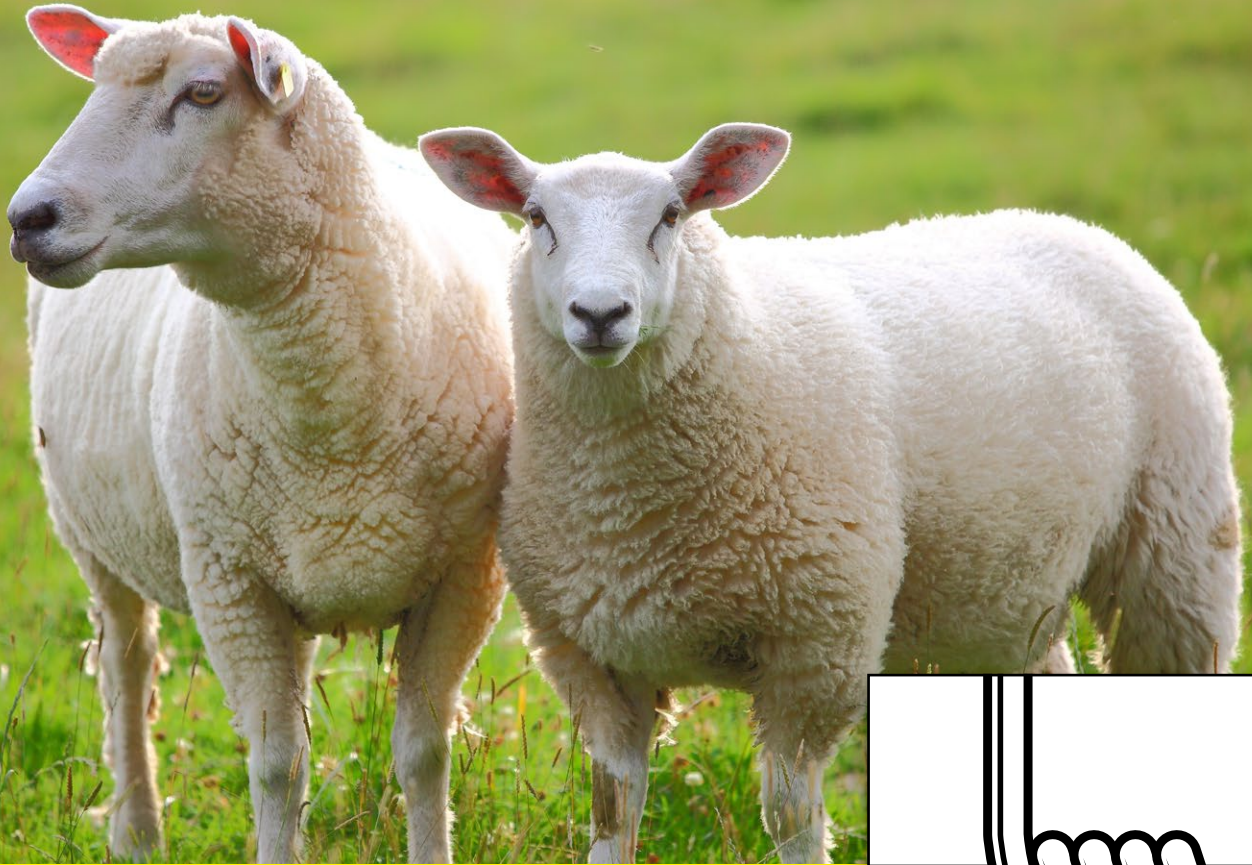

Twinlock netting has been designed to provide farmers with fast and cost effective temporary and permanent stock control solutions. Suitable for all low and medium pressure applications Twinlock netting is manufactured using zinc/alloy coated wire for long life and is available in 2.00mm and 2.50mm wire diameters.

Applications:

FIELD	Sheep, cattle, goats, conservation and forestry blocks
SOFT	Can be electrified break feeding, Lambs / docking
LIGHT	Low stock pressure, lifestyle and residential fences

Size range available:

TYPE	DESCRIPTION	LINE WIRES	HEIGHT (mm)	STAY WIDTH (mm)	LENGTH (m)
FIELD	B8 / 900	8	900	150	50 / 100
LIGHT*	BL7 / 900	7	900	300	50 / 100
	BL8 / 900	8	900	150	50 / 100
	BL8 / 900	8	900	300	100
SOFT**	B5 / 525	5	525	150	100

* Light uses a 2.00 mm high tensile wire for the line wire.

** Soft uses a low tensile wire for the line wire.



SINCE 1903

Freephone 0800 333 188
www.cyclonewire.co.nz

A division of
easysteel.
A FLETCHER BUILDING COMPANY